


eritage Window and Door, Inc.

6141 Casmere, Detroit, MI 48212

Phone (313) 893-2000, FAX (313) 893-2007

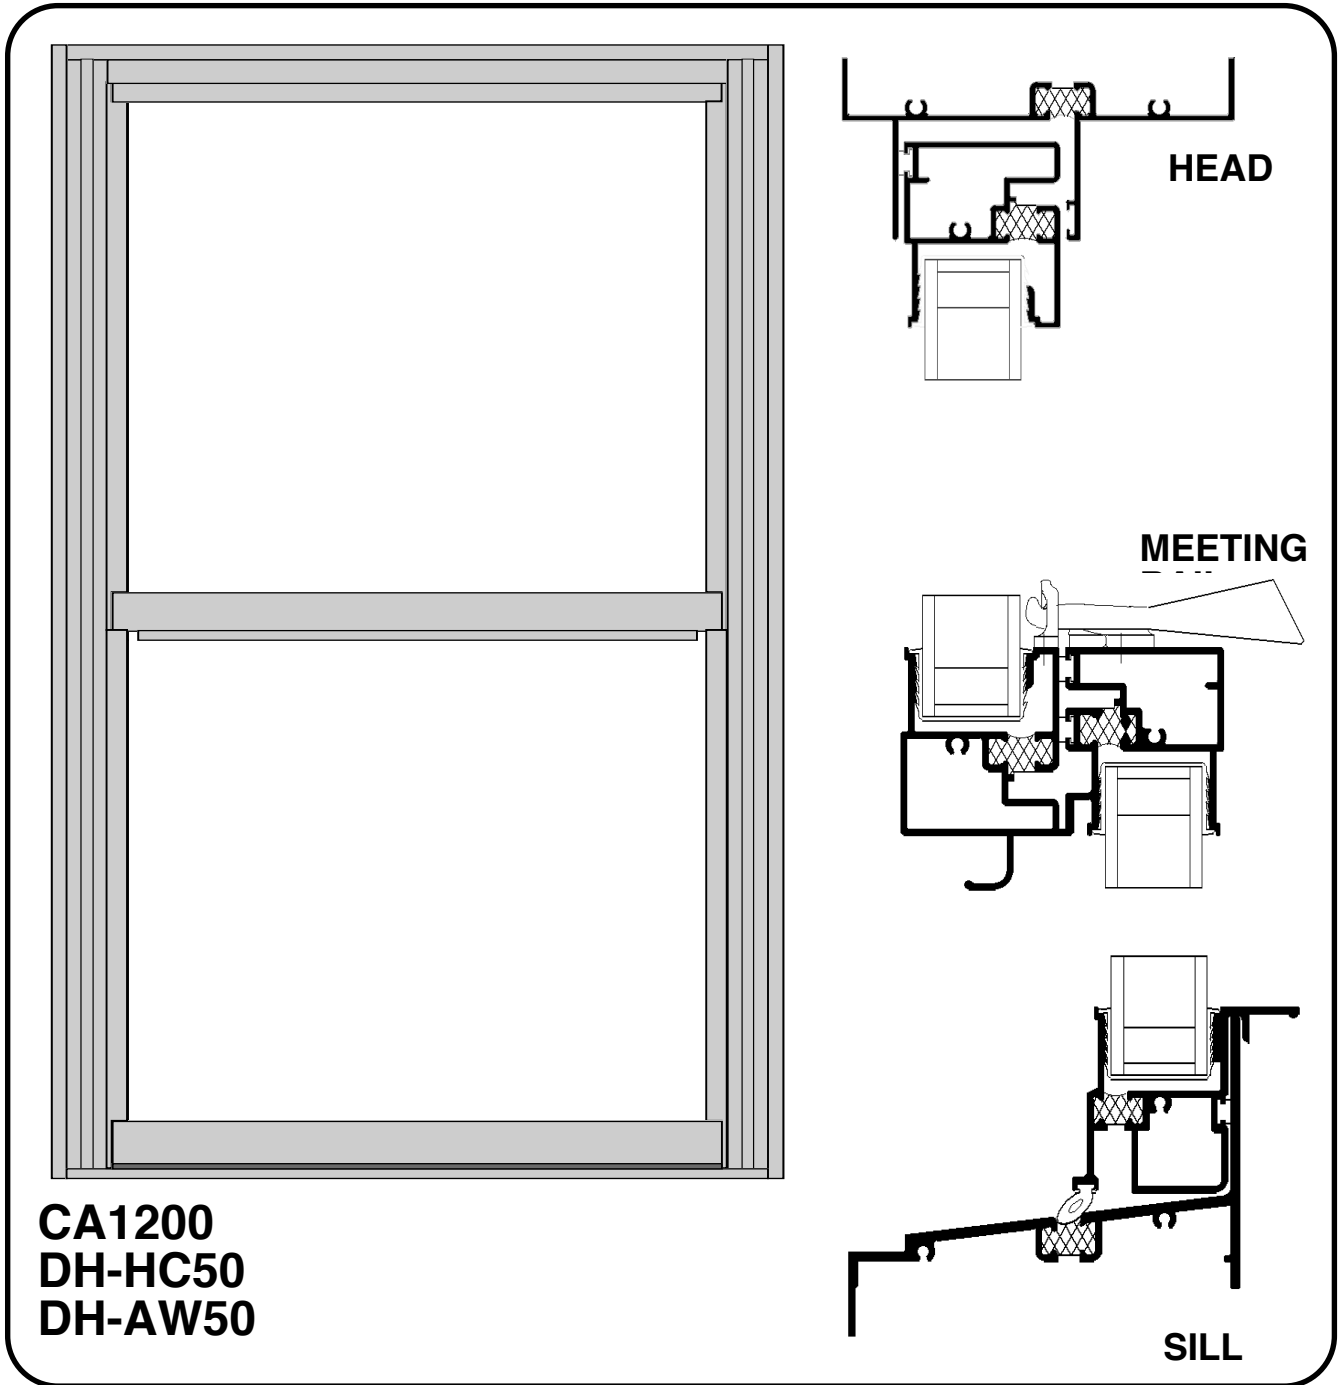

Thermally Broken, Monumental, Double or Single Hung Tilt Window

PRESERVING AMERICA'S WINDOW HERITAGE

MODEL CA1200 SPECIFICATIONS

Description

Thermally broken, Monumental, Double or Single Hung Tilt window.

Application

This thermally broken double/single hung is designed for institutional buildings, schools, high-rise buildings, hospitals and office buildings.

Special Features

Tilt and take out sash. single hung fixed sash removable. Historic applied muntin available with 5/8" glass. True muntin available with 1" glass.

Construction

Nominal wall thickness .062" (.093" sill) 6063 T-5 extruded aluminum with integral poured-in-place thermal barrier. All horizontal rails shall be of tubular construction. Joinery shall be butted and coped with stainless steel screws into integral screw ports, Sash shall be telescoped for additional strength.

Glazing

Standard: Factory glazed with 1" glass
Optional: Dual Glazed (Model CA1230)

Finishes

Standard: Bronze powdercoat, clear or bronze anodized.
Optional: Custom enamel or Duranar® finishes available, special order only


Hardware

Zinc tilt latches with maintenance-only operators. White bronze sweep locks (white bronze sill lock available). Spiral or block and tackle balances standard. (Ultra-Lift® balances available - special order)

Accessories

A full line of standard and historic pannels and trims available, receptors and mulls available. Applied and true muntins available.

For more information, contact your Heritage Window and Door, Inc. sales representative



Heritage Window and Door, Inc.
6141 Casmere, Detroit, MI 48212
Ph (313) 893-2000; FAX (313) 893-2007