
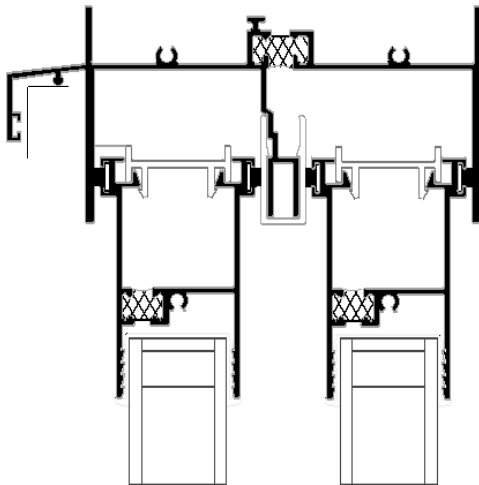



# eritage Window and Door, Inc.

6141 Casmere, Detroit, MI 48212

Phone (313) 893-2000, FAX (313) 893-2007

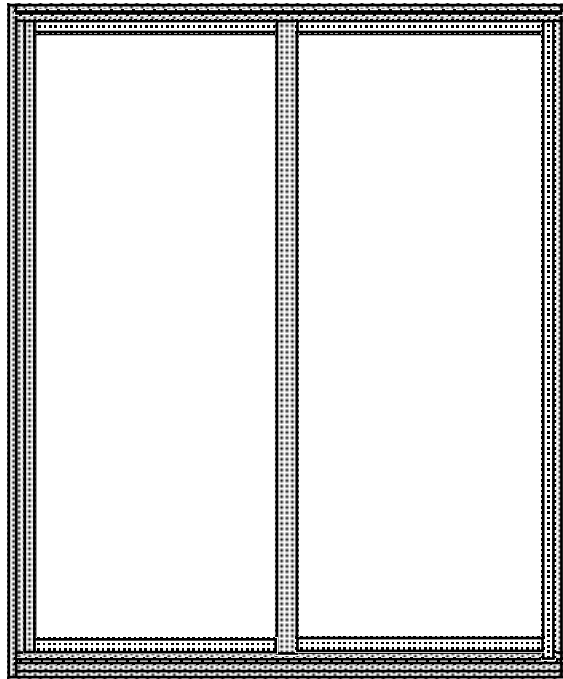

HEAD

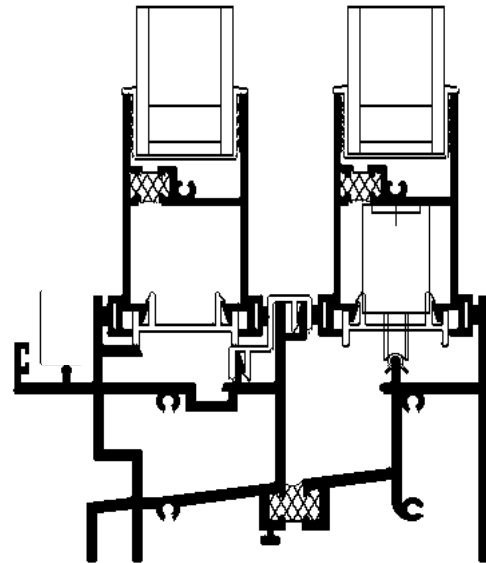

SILL

CA1650  
SGD-HC40/55

**Thermally Broken, Monumental, Sliding Glass Door**  
*PRESERVING AMERICA'S WINDOW HERITAGE*

# MODEL CA1650 SPECIFICATIONS

## **Description**

Thermally broken, monumental, sliding glass door.

## **Application**

This thermally broken sliding glass door is designed for high performance, heavy use and oversize applications, specifically high-rise buildings and custom homes.

## **Special Features**

Double sash construction allows for field reversal of operation. Ultra-heavy duty hardware and stainless steel track cover provide reduced operating force and greater longevity. Configurations include: XO; OX; OXO; XOO; OOX or OXXO.

## **Construction**

Nominal wall thickness .062" (.093" sill) 6063 T-5 extruded aluminum with integral poured-in-place thermal barrier. Joinery shall be butted and coped with stainless steel screws into integral screw ports, Sash shall be telescoped for additional strength.

## **Glazing**

Standard: Factory glazed with 1" tempered glass

Optional: Tinted tempered glass, Lo E tempered glass.

## **Finishes**

Standard: Bronze acrylic enamel, clear or bronze anodized.

Optional: Custom enamel or Kynar® finishes available, special order only


## **Hardware**

Screw adjustable double wheel ball-bearing rollers, Stainless steel track cover, heavy duty pull handle and lock, automatic spring loaded dust-plugs.

## **Accessories**

A full line of standard and historic panes and trims available, receptors and mulls available.

**For more information, contact your Heritage Window and Door, Inc.  
sales representative**

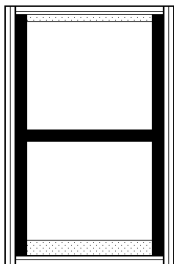

**Heritage Window and Door, Inc.**  
**6141 Casmere, Detroit, MI 48212**  
**Ph (313) 893-2000; FAX (313) 893-2007**